KERN & Sohn GmbH
Brickyard 1
D-72336 Balingen
E-mail: info@kern-sohn.com
Tel: +49-[0]7433- 9933-0
Fax: +49-[0]7433-9933-149
Internet: www.kern-sohn.com

Installation instructions Tripod

KERN IFB-A01 / A02

Version 2.0
2026-05
en



IFB-A01-A02-IA-e-2620

en

Tripod

Version 2.0 2026-05

Installation instructions

Table of contents

1 Technical data 3

1.1 Dimensions 4

2 Scope of delivery 6

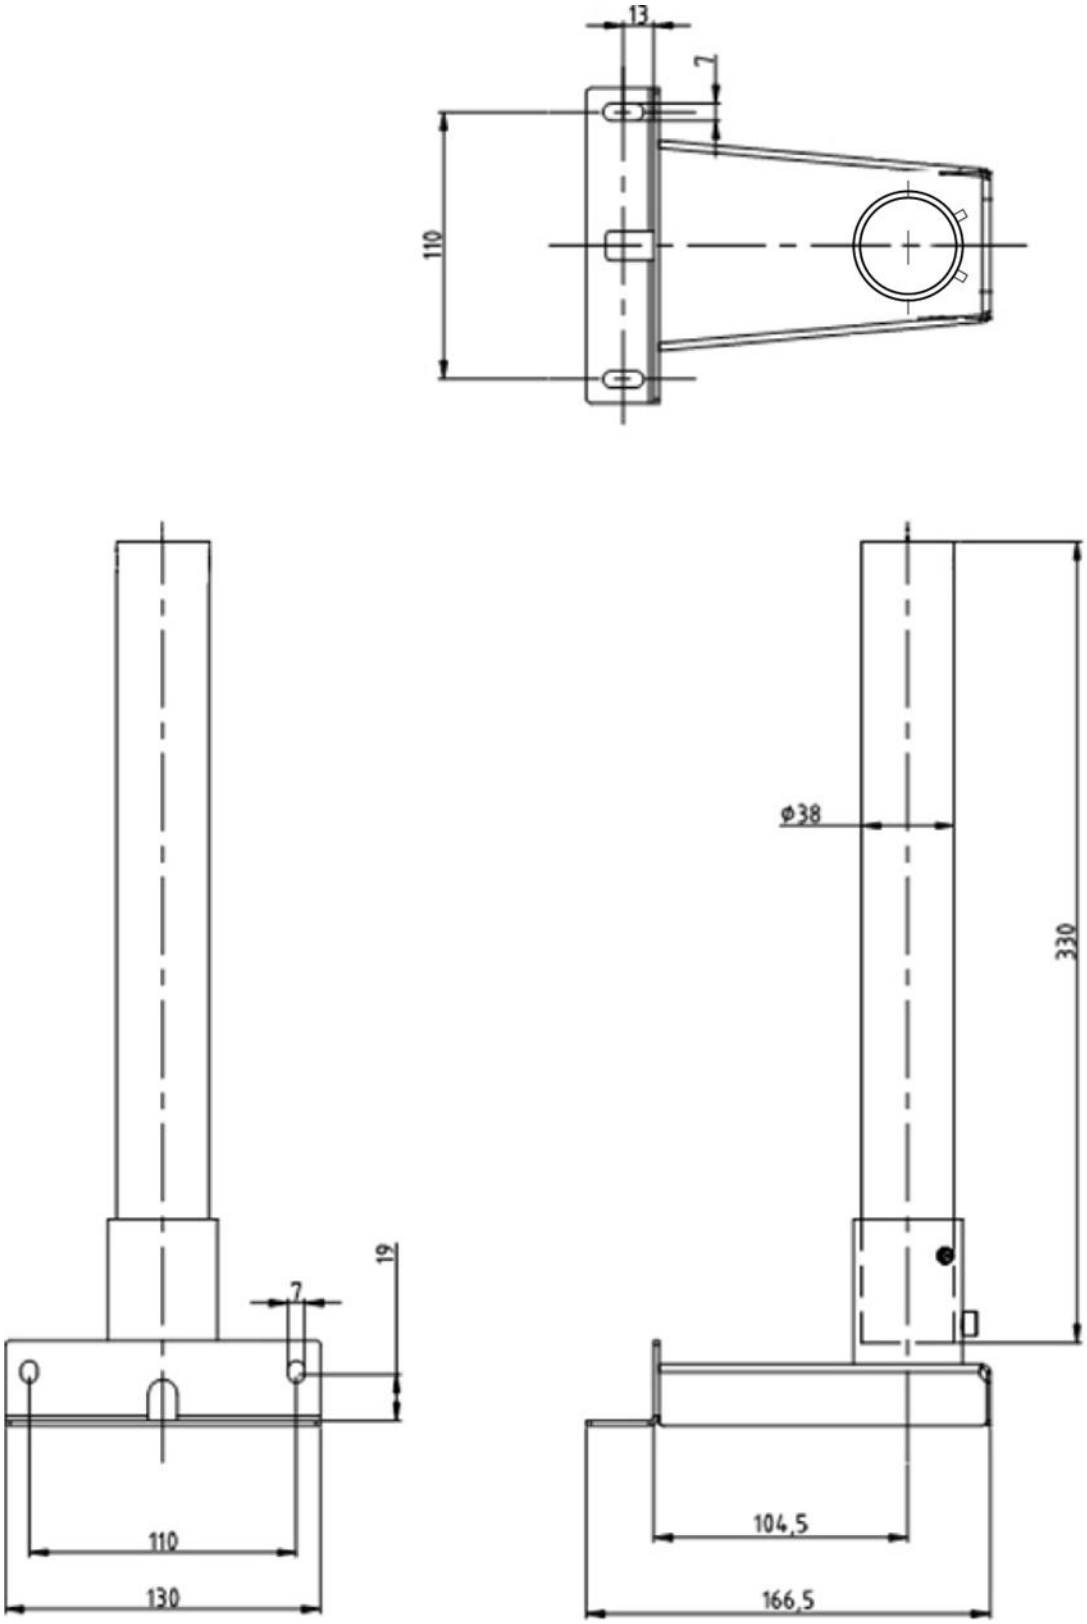
3 Installation 7

1 Technical data


KERN	IFB-A01	IFB-A02
Tripod height (mm)	330	600
For platform sizes (mm)	300 x 240 400 x 300 500 x 400 650 x 500	400 x 300 500 x 400 650 x 500


1.1 Dimensions


Models with 330 mm:













Models with 600 mm:

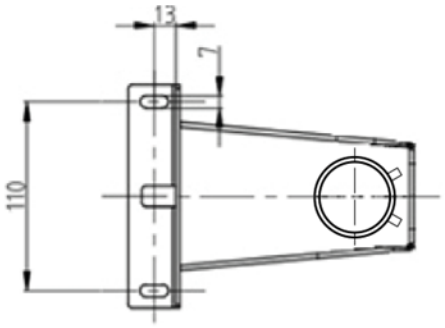

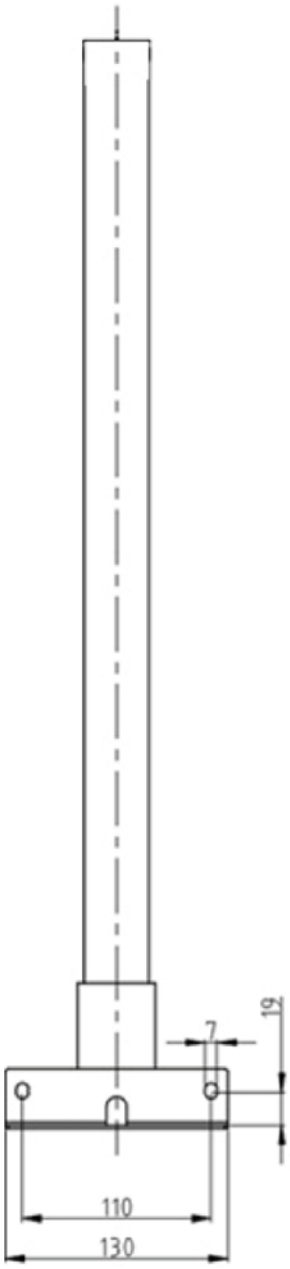

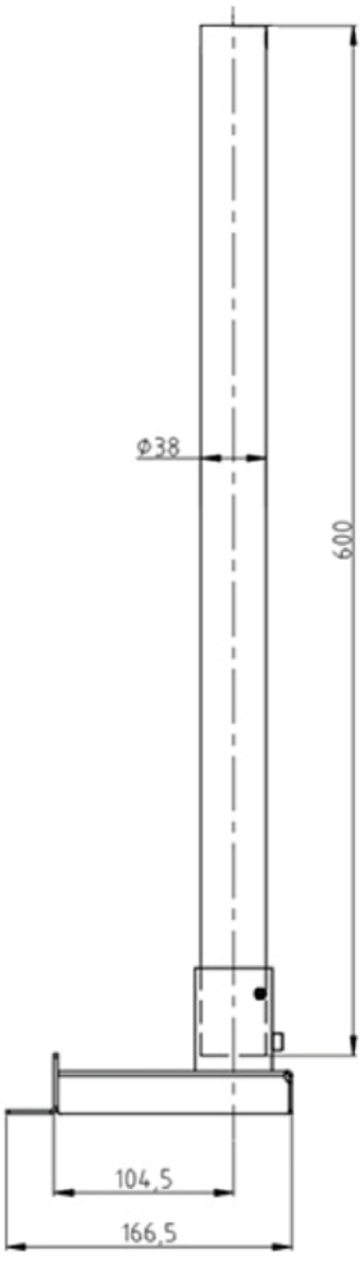

2 Scope of delivery

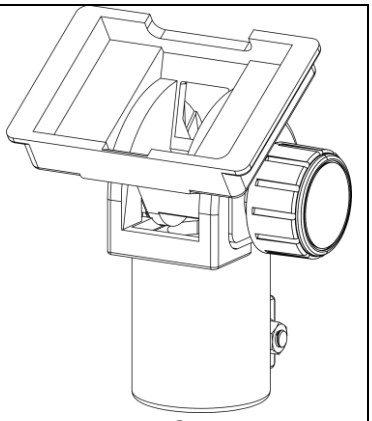 **A** Tripod base 1 x	 **B** Tripod tube 1 x	 **C** Holder for display unit 1 x
 **S1** M6 x 16 4 x	 **S2** Spring washer 4 x	 **S3** Washer 5 x
 **S4** M6 x 12 1 x	 **S5** M6 x 10 2 x	 **S6** M8 x 20 1 x
 **S7** M8 nut 1 x	 **S8** Adjustable foot 1 x	 **S9** M6 nut 1 x

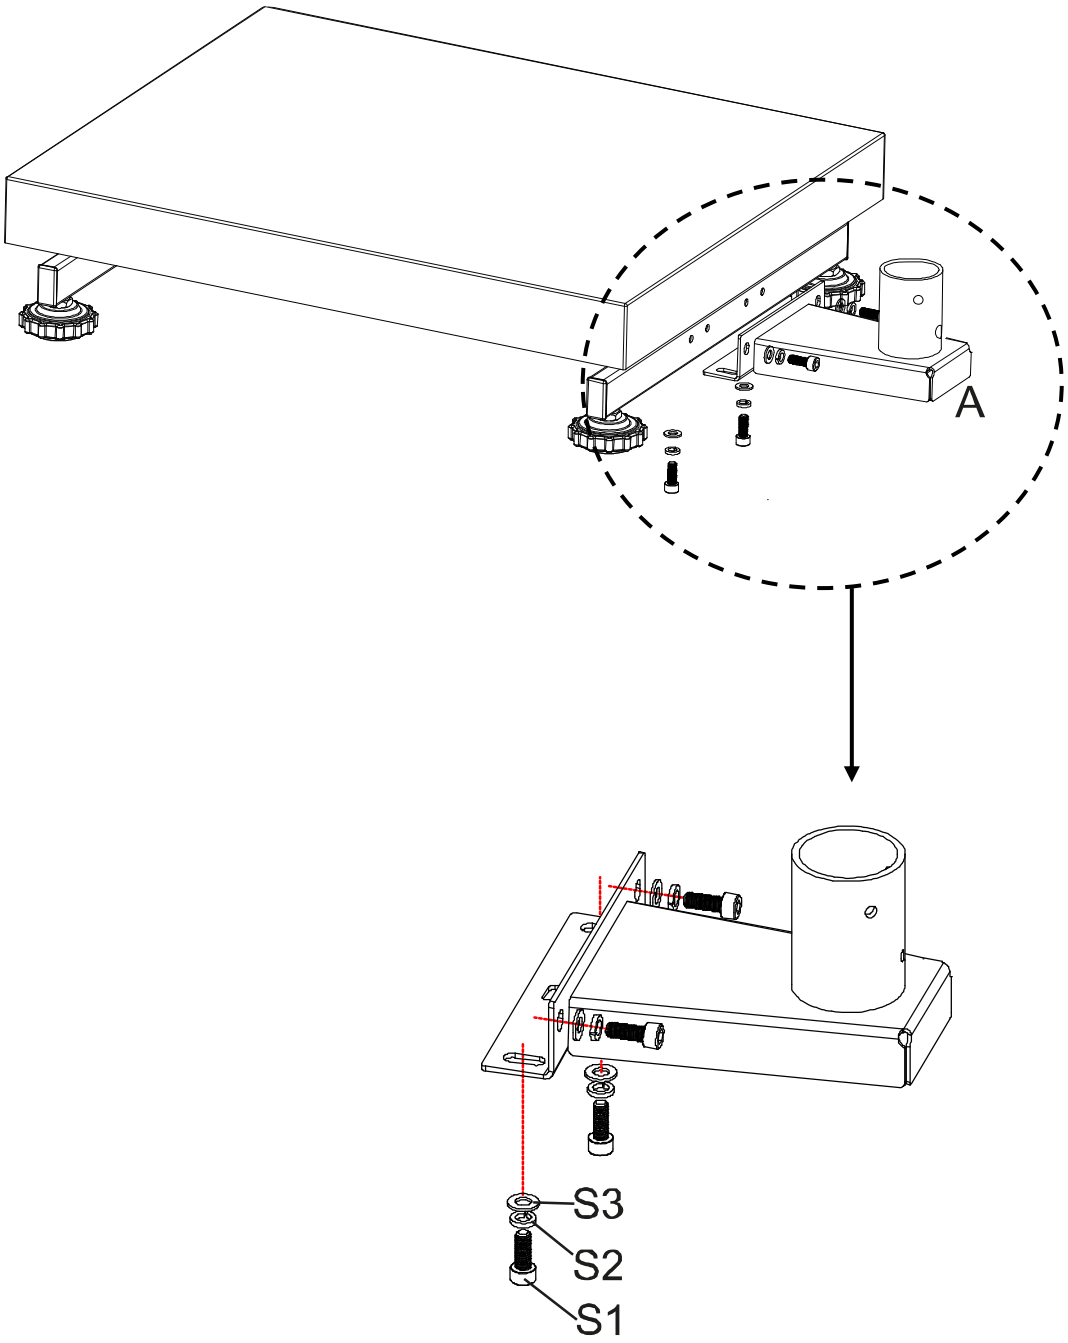
C, **S3** (1x), **S6** and **S7** are supplied pre-assembled.

3 Installation

Attach the stand base to the platform:

1. Position the stand base **(A)** centrally over the holes on the side of the platform.
2. First place the spring washer **(S2)** and then the washer **(S3)** on the screw **(S1)** (4 x).
3. Tighten the tripod base.

   Make sure that you do not pinch or damage any cables.




Attach the tripod tube to the tripod base:

4. Unscrew screws **S4** and **S5** from the stand tube.

5. Insert **the** tripod tube **(B)** into the tripod base. Ensure that the hole in the stand tube matches the hole **S4**.

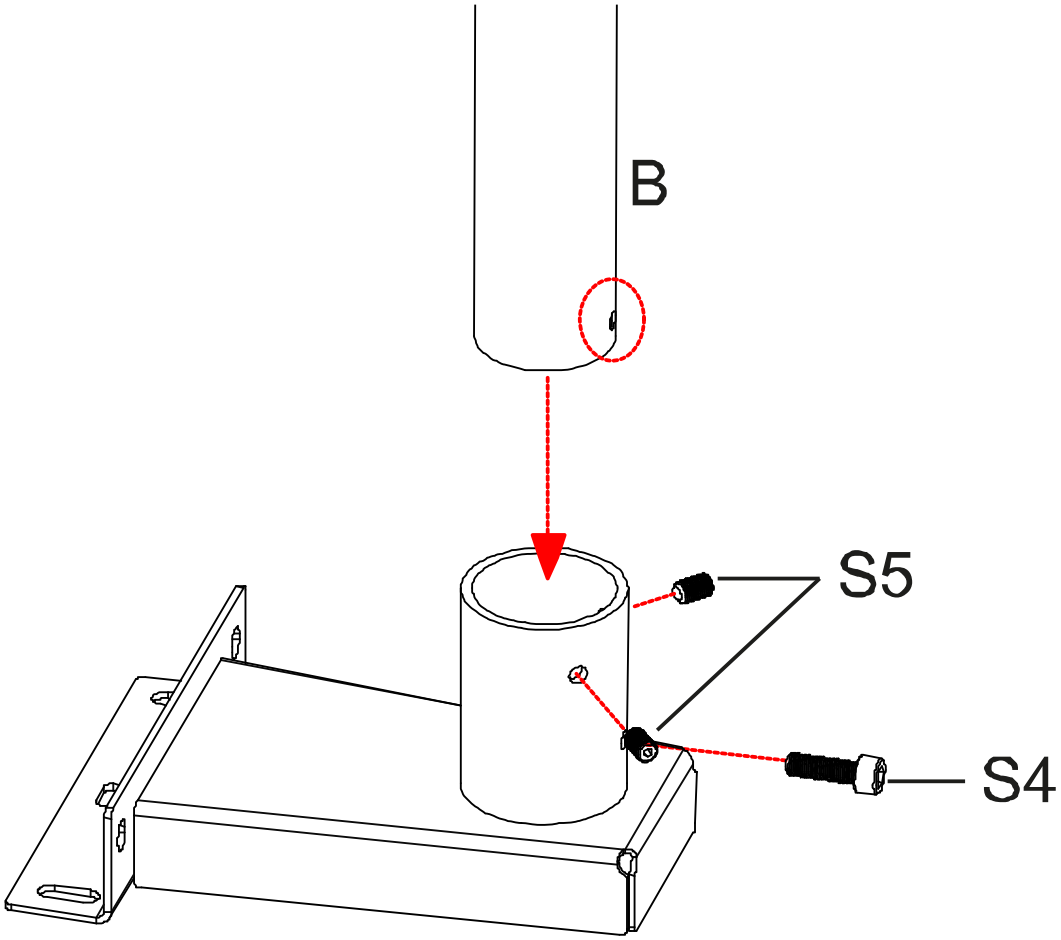
6. Screw in screws **S5** again and fix the stand tube with screw **S4**.



7. Screw nut **S9** onto the adjustable foot **S8**.


8. Screw the adjustable foot, with the nut, into the tripod tube from below.

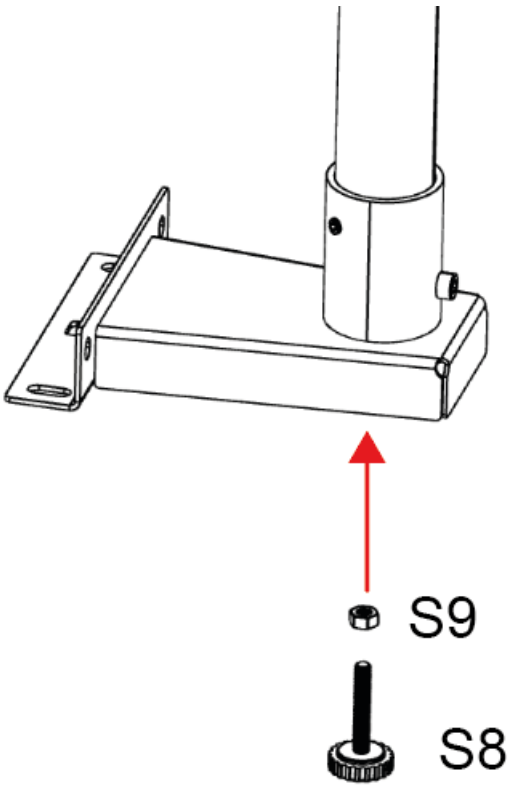9. Unscrew the adjustable foot until it touches the floor and secure it with nut **S9**.



Attach the display unit to the stand tube:

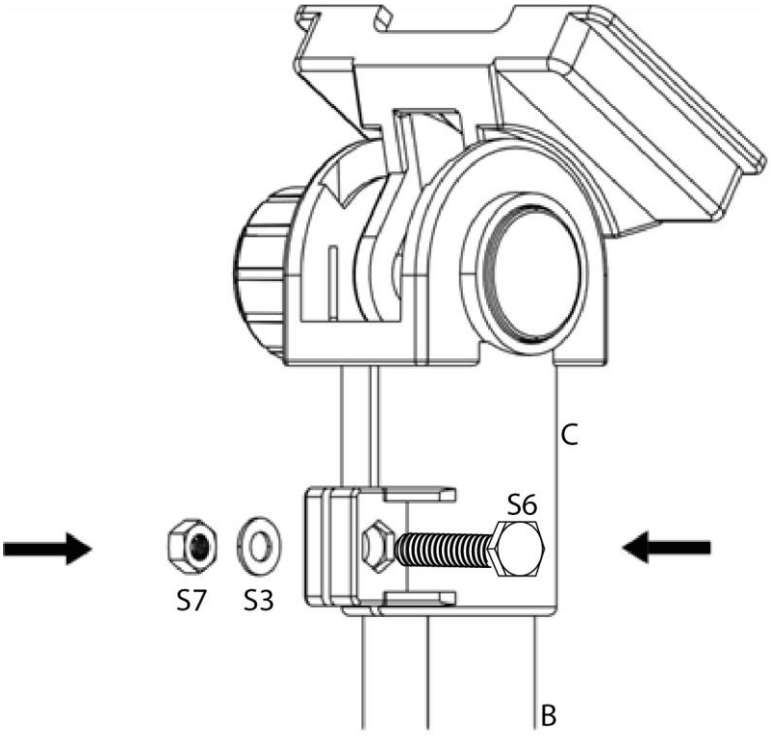10. Insert the holder for the display unit **(C)** into the stand tube and fasten with the screws **S6**.



⇨ Insert the holder **(C)** for the display unit into the upper end of the stand tube **(B)** and secure with the screw **(S6).**

Counter on the opposite side with the washer **(S3)** and the nut **(S7).**