KERN & Sohn GmbH
Ziegelei 1
72336 Balingen-Frommern
Germany
+0049-[0]7433-9933-0
+0049-[0]7433-9933-149
info@kern-sohn.com

Installation Instructions Stands

KERN SFB

Type SFB-A01

Version 2.0
2026-06
en



en

Stands

Version 2.0 2026-06

Installation Instructions

Contents

1 Technical data 3

1.1 Dimensions 3

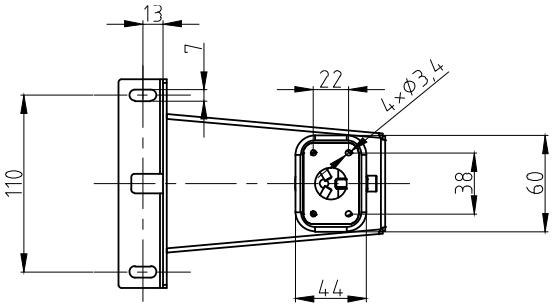
2 Scope of delivery 4

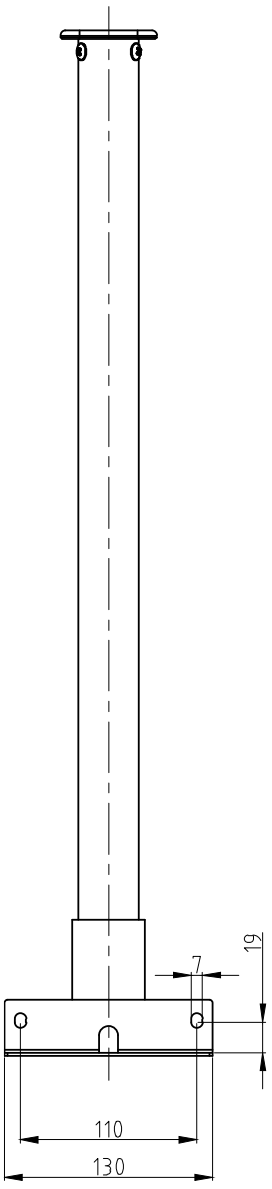
3 Installation 5

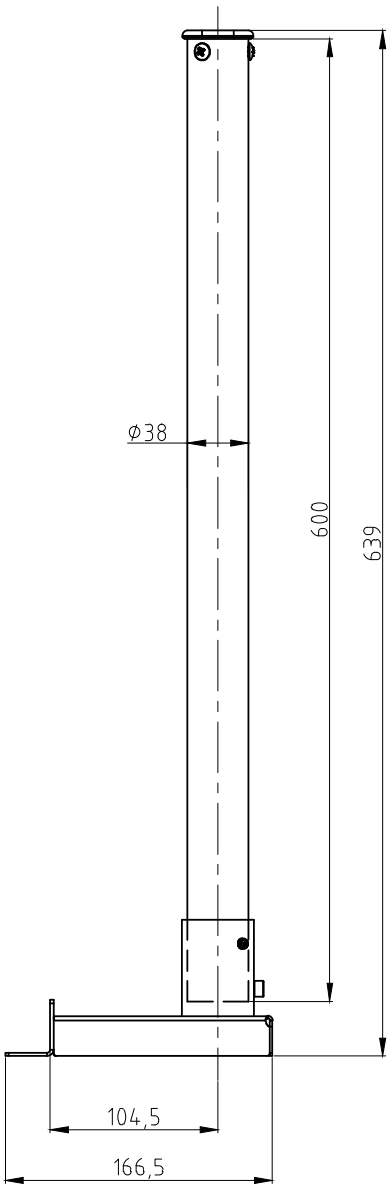
1 Technical data

KERN	SFB-A01
Stand height (mm)	600









1.1 Dimensions







2 Scope of delivery


 **A** Stand foot 1 x	 **B** Stand tube 1 x	 **C** Support for display unit 1 x
 **S1** M6 x 16 4 x	 **S2** Spring washer 4 x	 **S3** Washer 4 x
 **S4** M6 x 12 1 x	 **S5** M6 x 10 2 x	 **S6** M5 x 16 3 x
 **S7** M4 x 10 4 x	 **S8** Adjustable foot 1 x	 **S9** M6 nut 1 x

3 Installation

Assembling the stand foot to the platform:

1. Place the stand foot **(A)** centrically over the perforations on the platform side.
2. First plug the spring washer **(S2)** and then the washer **(S3)** on the screw **(S1)** (4 x).
3. Screw down the stand foot.

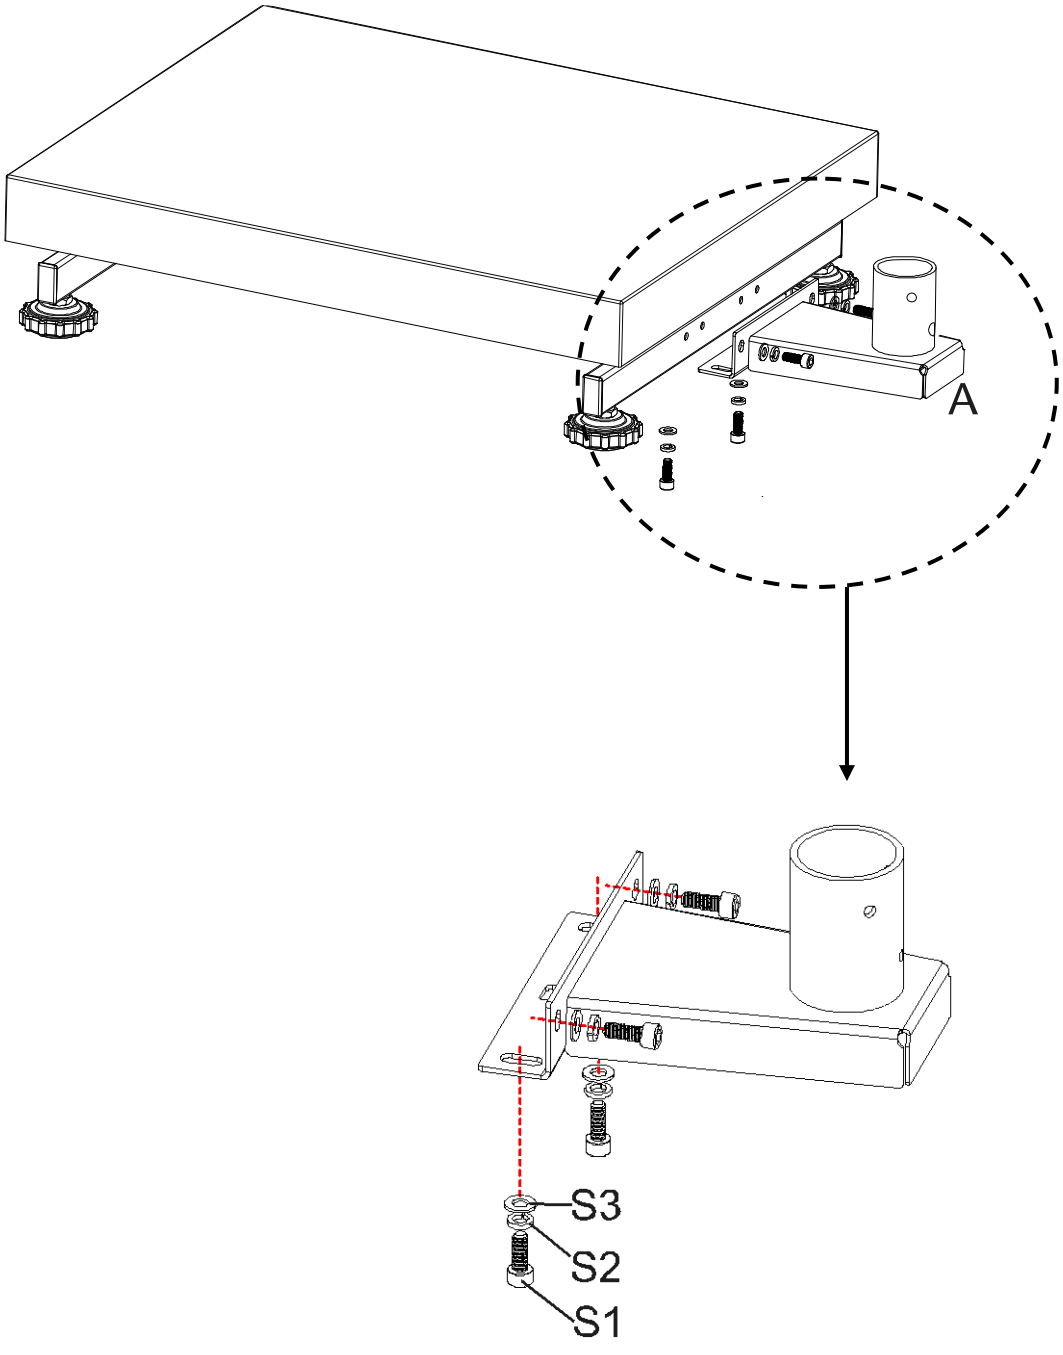   Make sure that no cables are jammed or damaged.




Assembling the stand tube to the stand foot:

4. Unscrew the screws **S4** and **S5** from the stand tube.

5. Push the stand tube **(B)** into the stand foot. Ensure that the perforation of the stand tube matches with the perforation **S4**.

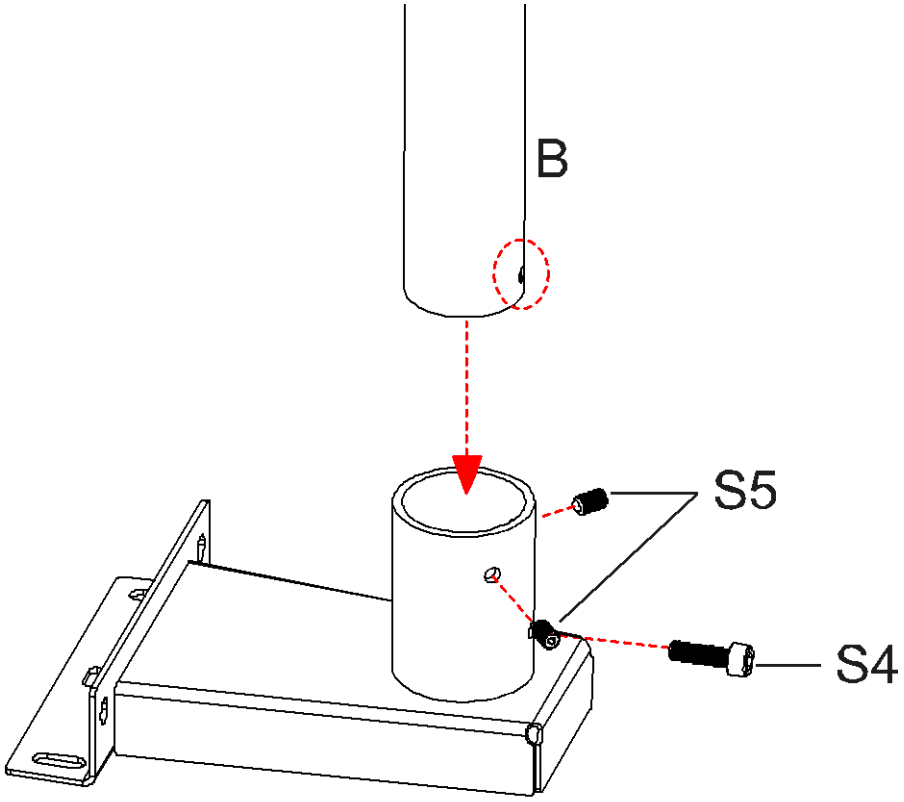
6. Screw down again the screws **S5** and fasten the stand tube using screw **S4**.



7. Screw nut **S9** onto the adjustable foot **S8**.

8. Screw the adjustable foot, with the nut, into the tripod tube from below.

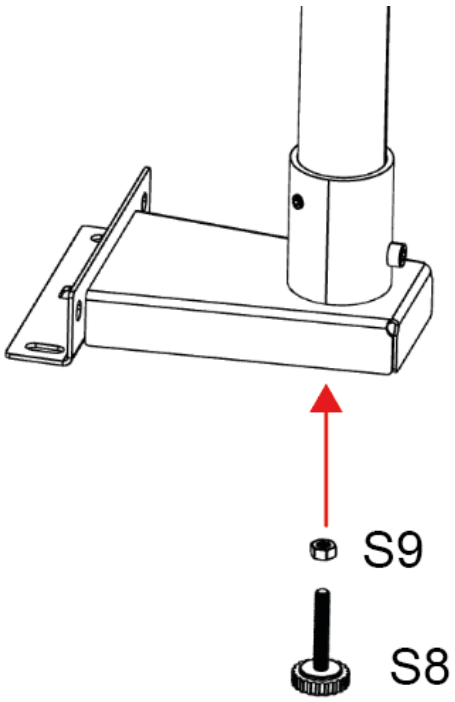
9. Unscrew the adjustable foot until it touches the floor and secure it with nut **S9**.



Assembling the display unit to the stand tube:

10. Push the support of the display unit **(C)** into the stand tube and fasten it using screws **S6**.

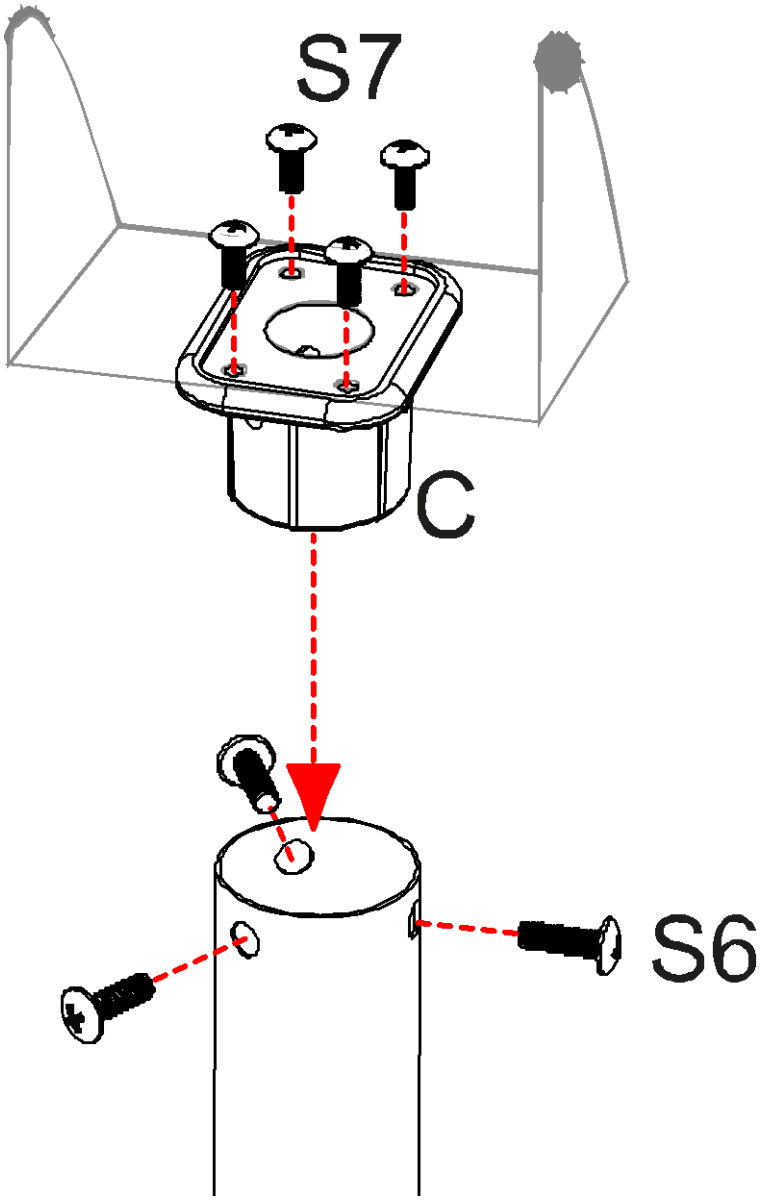11. Fasten the display unit to the display unit's support using screws **S7**.


S7
C
S6