
KERN DS 30K0.1L

Precision industrial scale with laboratory accuracy, ideal for the diverse possibilities of Industry 4.0 applications

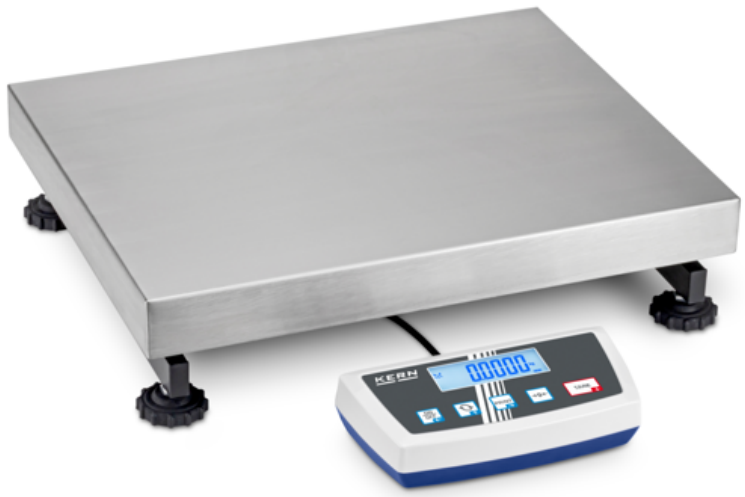

Article codes, product groups & Status information	
Model article-code	DS 30K0.1L
Model-Serie	DS
Assortment	Scales
Product Type	Industrial balance
Product group	Platform scales
Product usage type	Main article
EAN code (Model)	4045761491687
Predecessor Model	DS 30K1L-2.021a; DS 30K1L-2.024a
Planned start date	2025-2HJ
Customs tariff number	84238129
CE Label	Yes
Country of Origin	DE

Technical data - Primary	
Weighing capacity	30 kg
Readability	0,0001 kg
Minimum piece weight	2 g
Net weight	11,7 kg
Platform size	500×400 mm
Indicator cable length	2,5 m
Dimension weighing platform (W×D×H)	500×400×127 mm

Technical data - Construction	
Dimensions display casing (W×D×H)	225×115×60 mm
Material weighing plate	Stainless steel
Material Platform construction	Coated metal
Revolving screw feet	Yes
Dimensions of weighing plate (W×D)	500×400 mm
Wall mount	Yes

Technical data - Display	
Display height	21 mm
Backlight	Yes

Technical data - Power supply	
Mains adapter/adapter included	CH;EURO;UK;US
Charging time	8 h
Input Voltage	100 V - 240 V AC, 50 / 60 Hz
Operating time (Backlight off)	48 h
Rechargeable battery	Rchrg. battery optional - intern
Interfaces	Analog (4 - 20 mA) (optional);Bluetooth BLE (v4.0) (optional);Ethernet (optional);RS-232 (optional);USB-Device (optional);WLAN (optional)

Technical data - Measuring system	
Calibration method	Adjusting with external weight
Linearity	± 0,0003 kg
Recommended adjusting weight	30 kg (F1)
Repeatability	0,0002 kg

KERN DS 30K0.1L

Precision industrial scale with laboratory accuracy, ideal for the diverse possibilities of Industry 4.0 applications

Resolution	300.000
Stabilisation time under laboratory conditions	3 s
Warm up time	120 min
Weighing system	Strain gauge
Weighing units	Ct;dwt;ffa;g;kg;lb;mo;oz;ozt;tl (HK);tl (Singap, Malays);tl (Tw)

Technical data - Environmental conditions

Maximum humidity	80 %
Maximum operating temperature	40 °C
Minimum ambient temperature	-10 °C

Technical data - Packing & Shipping

Dimensions packaging (W×D×H)	930×550×210 mm
Gross weight	13 kg
Net weight	12 kg
Shipping method	Parcel service
Packaging component - by weight - cardboard	800 g
Delivery time	1 d

Technical data - Counting data

Counting resolution	150.000
Mininum piece weight at piece counting (Laboratory)	200 mg

Optional Services

DAkkS Calibration	963-128

Functions

Standard



Option

